


ULTRA 630SE-CO-M

LOW-RISE COMMERCIAL LIFT


Capacity	630Kg – 8 persons
Max. Travel	18m / 6 levels
Pit Depth	900mm
Headroom	3300mm
Speed	0.63 m/s or 1.0 m/s
Doors	900mm x 2000mm – centre opening

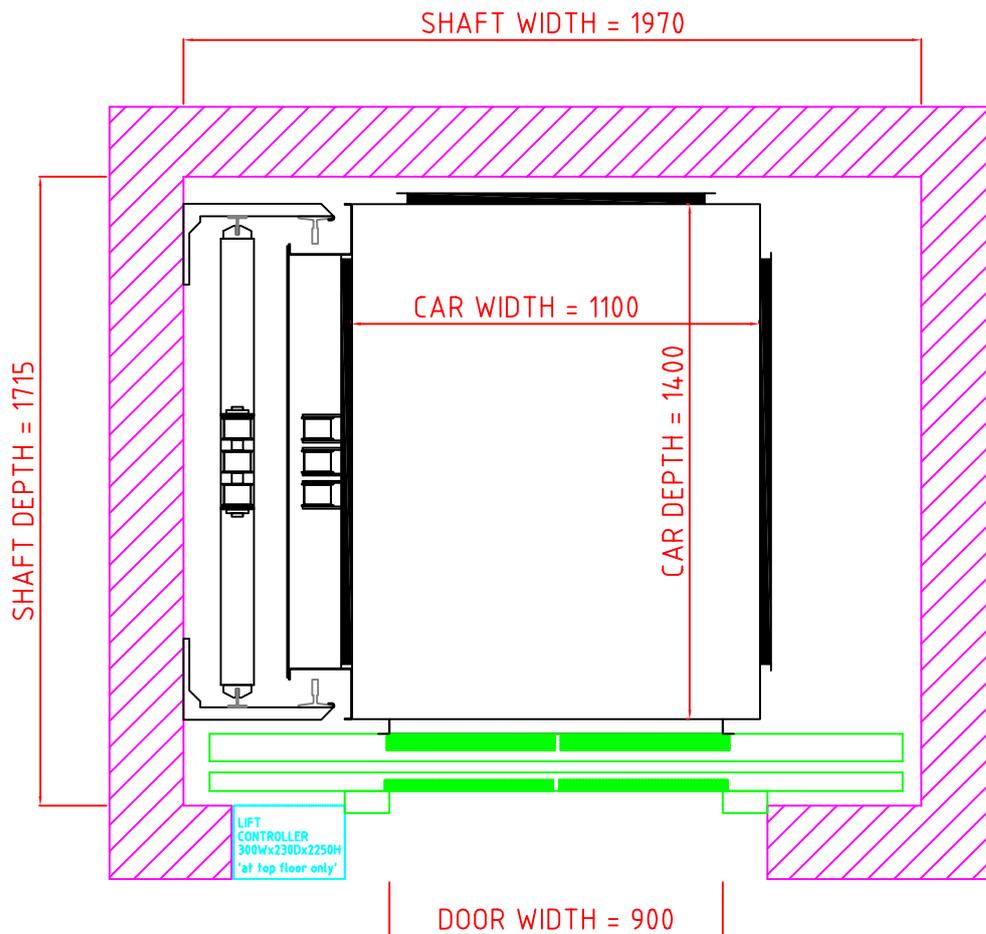

ULTRA 630SE-CO-ST

LOW-RISE COMMERCIAL LIFT
WITH SUPPORTING STRUCTURE


Capacity	630Kg – 8 persons
Max. Travel	18m / 6 levels
Pit Depth	900mm
Headroom	3300mm
Speed	0.63 m/s or 1.0 m/s
Doors	900mm x 2000mm – centre opening

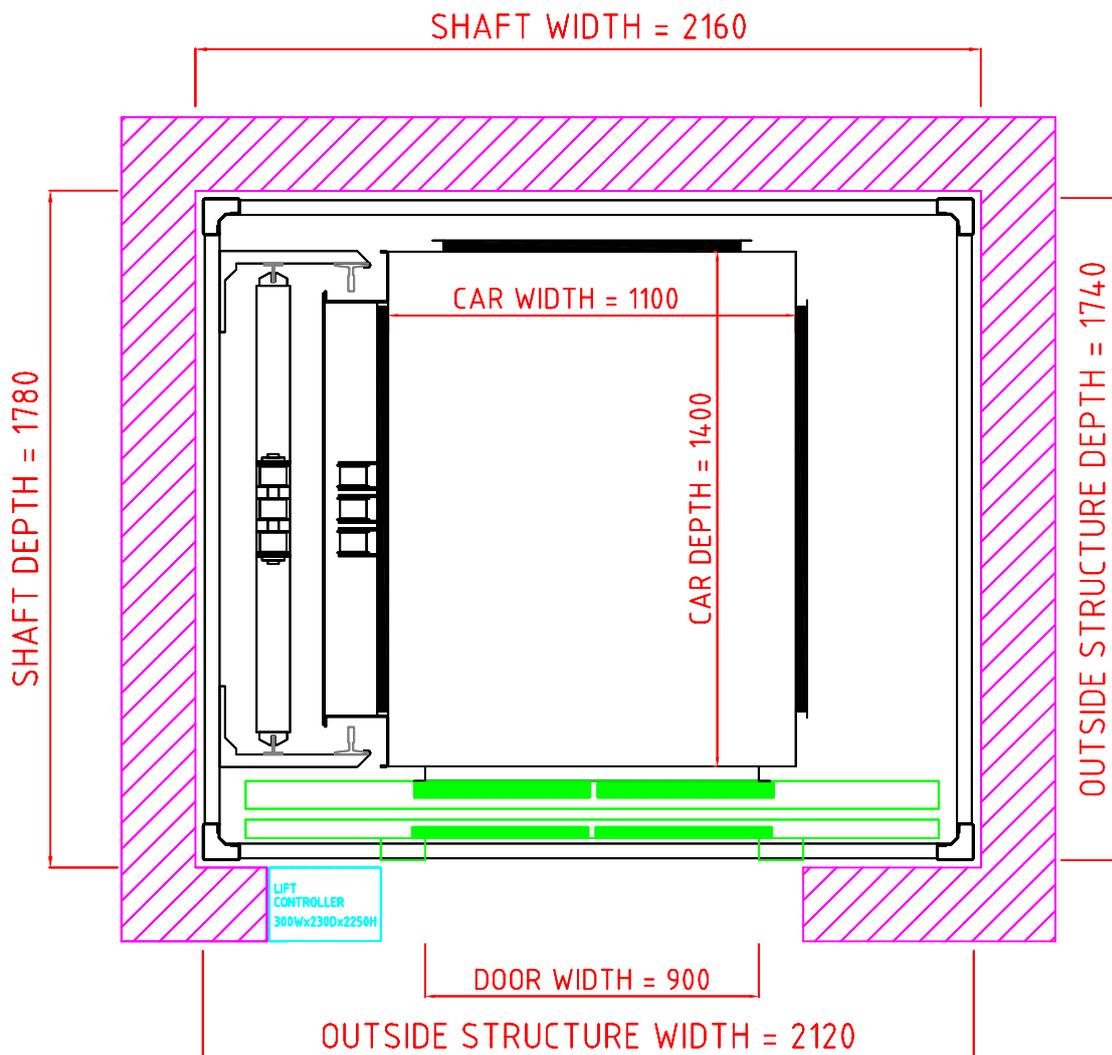

ULTRA 630SE-SO-M

LOW-RISE COMMERCIAL LIFT


Capacity	630Kg – 8 persons
Max. Travel	18m / 6 levels
Pit Depth	900mm
Headroom	3300mm
Speed	0.63 m/s or 1.0 m/s
Doors	900mm x 2000mm – side opening

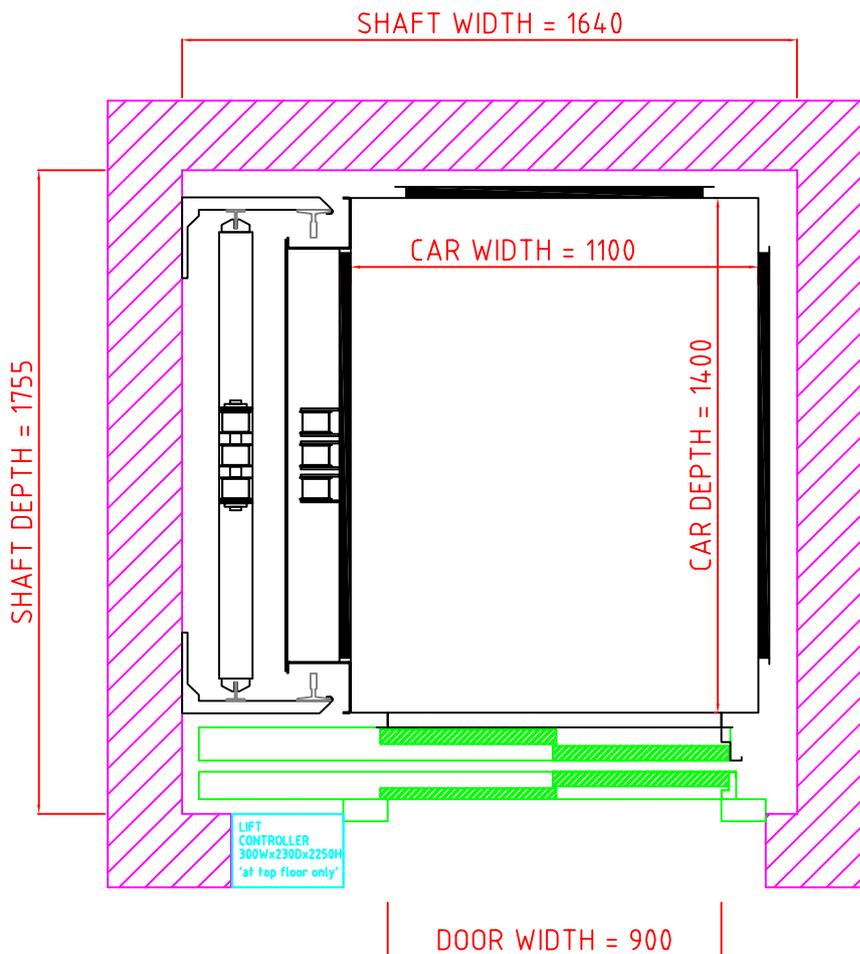

ULTRA 630SE-SO-ST


LOW-RISE COMMERCIAL LIFT WITH SUPPORTING STRUCTURE

Capacity	630Kg – 8 persons
Max. Travel	18m / 6 levels
Pit Depth	900mm
Headroom	3300mm
Speed	0.63 m/s or 1.0 m/s
Doors	900mm x 2000mm – side opening

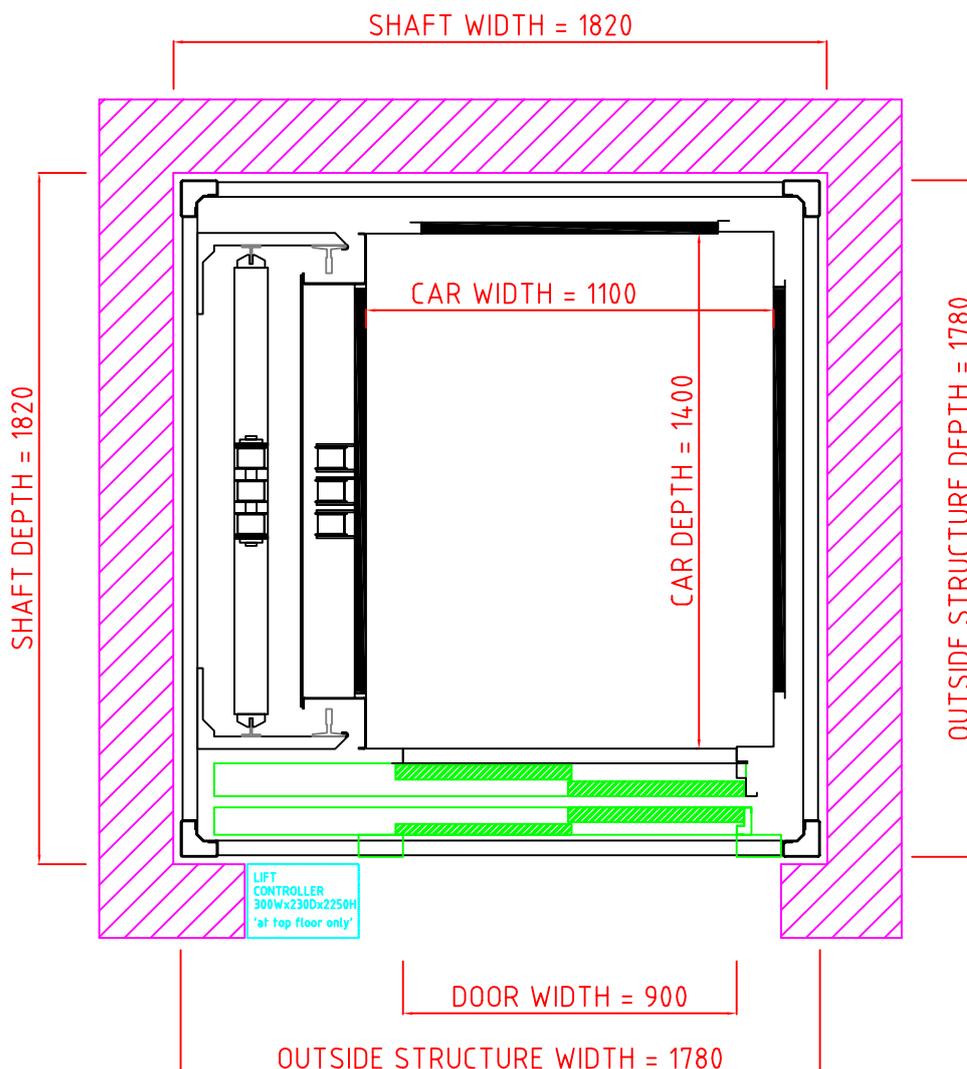

ULTRA 630SE


SHAFT ELEVATION

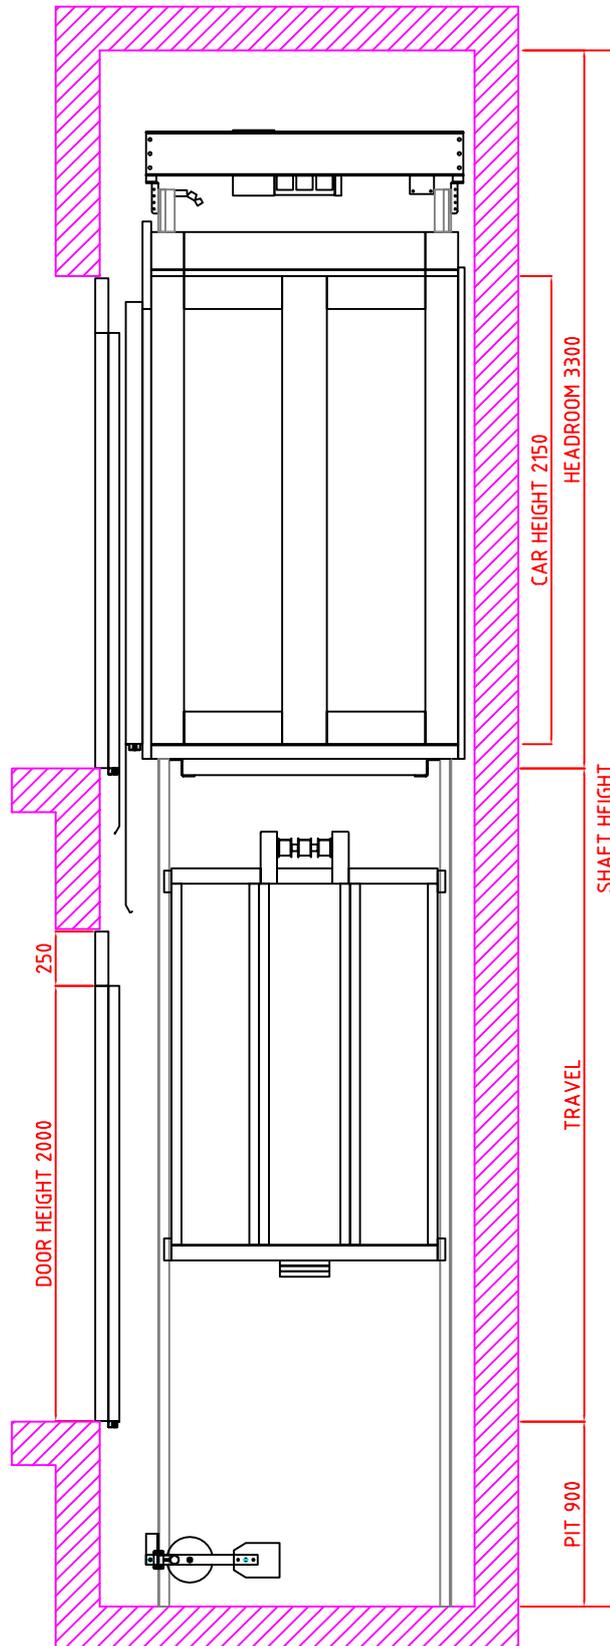

ULTRA 630SE

MAXIMUM PIT LOADINGS

- A – 2077Kg
- B – 2311Kg
- C – 3356kg
- D – 638kg
- E – 713Kg

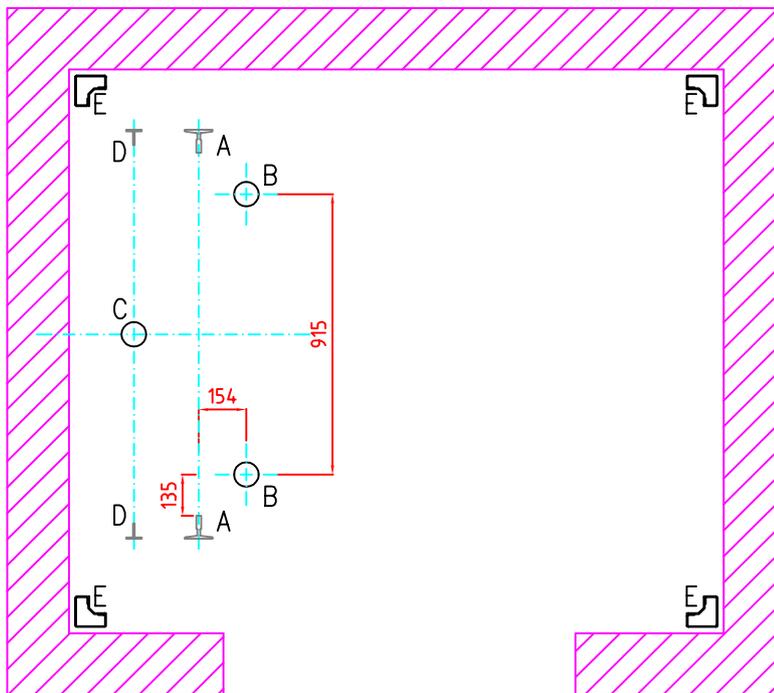

(loads 'E' only apply in case of metal supporting structure)